





V

V f fd



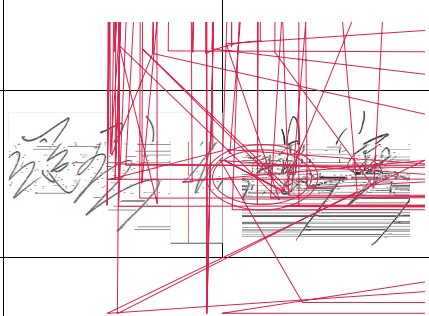

li o n i m f n

g e n e r a t o r f a b r i c a t i o n

i l




d o n

d o n

LC

- × ×
- × ×
- :
-
-
-
-
-
-



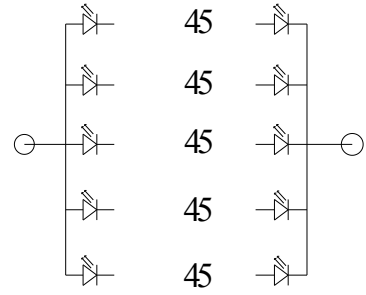

Notes for Table:

. D.C. Current : $T_j = T_s + R_j \cdot s \times P_i$



						—	
	Φ						
		±					
				—	—	—	—
			—		—	—	

3000K 2700K
4000K
5000K
5700K


Notes for Table

*

±

±



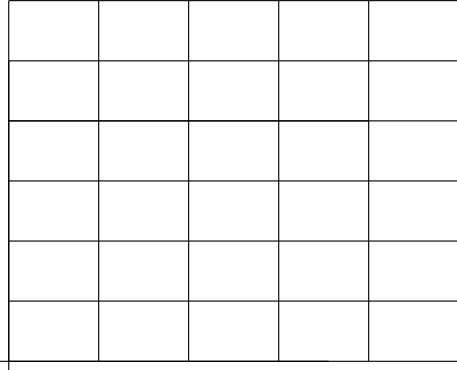


I l n t h a i l

—

—


og d i o m f o r c c h s

I d d l

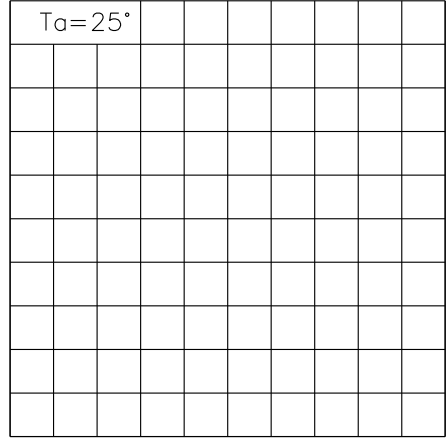


30

800

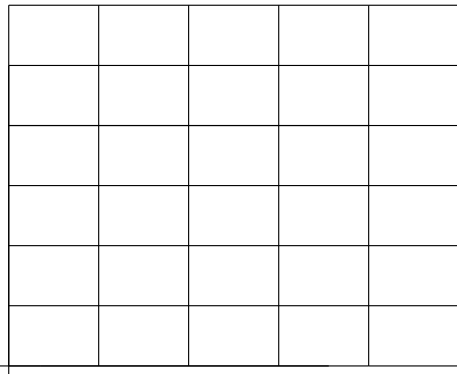


F

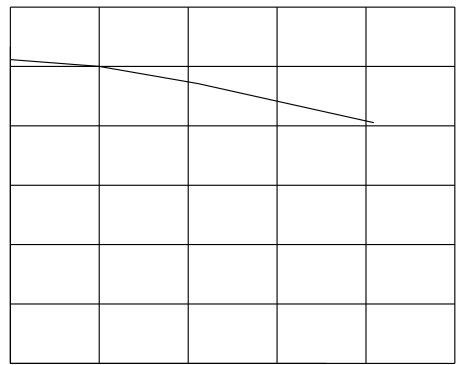


F



 HONGLITRONIC 鸿利光电		RoHS
TYPE:		QTY:
VF:	IF:	ϕ V:
TC:	X/Y:	
SOCM:	D- λ :	
DATE:		LOTNO:

 HONGLITRONIC (Product Identity Card) 鸿利光电	
品名 (Description):	
产品型号 (Type):	
发光颜色 (Color):	
数量 (QTY):	
生产批号 (LOT NO):	
出货日期 (Date):	

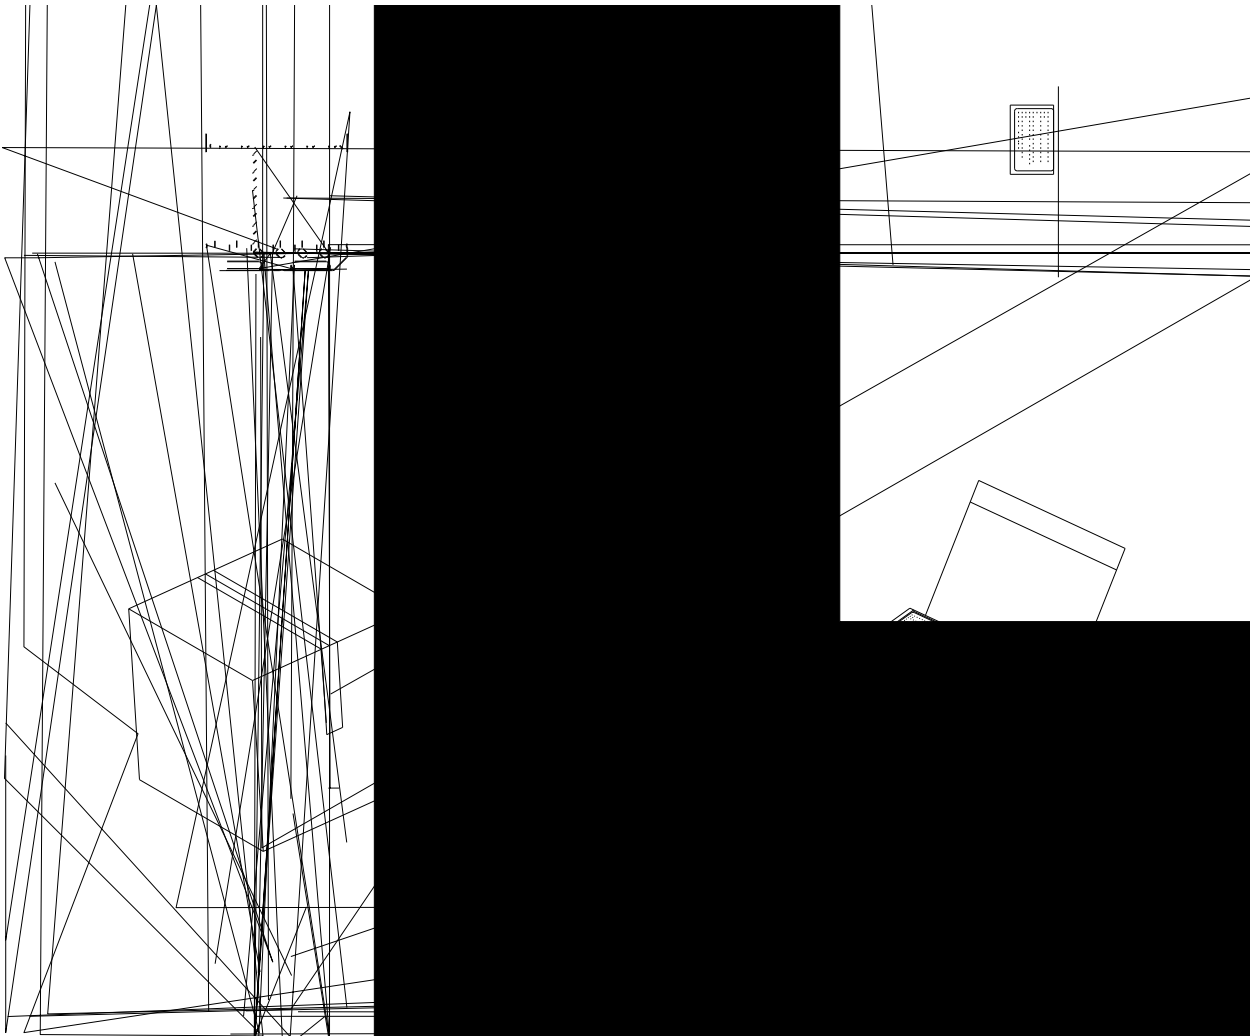



Precaution for use ()

1. Storage

W d / f d f OH . 8 . 63 F/ d0
 3(1OH e 4 ; 1 df d 1S d d
 d df df d 2 OH 1 f = 453 F 8 F/
 3 1H f d d d1
 30° C

120° C±5° C

2.W fd

V f = f OH 1L d / 0
 d d 683 F d P d 8 f /d /
 d e d df d d e d e d f 1
 S d d / d f df d f
 edd d + f d / f d d d / f1/ d d d 0
 d d de d 1Le f f / fd d d OH de /
 d d 1
 d e / d d d d d d e
 df 1 d d + d V ,/ d OH d
 d e df 1L f d0 d f / d d d 833 .
 350° C

61D 0Vd f P d

S d d d d d f d f d / f d d f d f
 d 0 d f d f>d d f d / df /fd d d 0
 d d e f f f d 2 1W HV f A
 4333 + EP ,/d d e d d / d d f d Vd f H f f e
 HV 1



1W d F

f d f d f f =E W + d
d , f e ; 8 , COB recommendation colloid surface temperature control ≤ 180 1

85°C

180°C

81W f

f d f d f 1R f d f fd e dff

