



TEST REPORT

According to ANSI/IES LM-80-15 For

Hongli Zhihui Group Co., Ltd. Guangzhou Branch

Room 316, Building 2, No.1, Xianke Yi Road, Huadong Town, Huadu District, Guangzhou, China

Model: HL-EMC-5050D90W-B6C2-S1-HR1

Report Type:	Product Type:
17000 Hours Test Report	LED Package

Test Date:	2021-05-20 to 2023-04-28
Report Date:	2023-08-31
Approved by:	Blake Zhang / EE Engineer
Prepared By:	Bay Area Compliance Laboratories Corp. (Shenzhen) 5/F(B-West) -7/F, the 3rd Phase of Wan Li Industrial Building D, Shihua Road, Futian Free Trade Zone Shenzhen, Guangdong, China. Tel: +86-755-33320018 Fax: +86-755-33320008
Test Facility:	Test facility was located at No.12, Pulong East 1 st Road, Tangxia Town, Dongguan, Guangdong, China.

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.(Shenzhen). This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, or any agency of the U.S. Government.





TABLE OF CONTENTS

1 - General Information.....

Bay Area Compliance Laboratories Corp. (Shenzhen)



5/F(B-West) -7/F, the 3rd Phase of Wan Li Industrial Building D, Shihua Road, Futian Free Trade Zone Shenzhen, Guangdong, China. The NVLAP Lab Code is 200707-0

1 - General Information

1.1 Description of LED Light Sources#

Sample Size:

50 PCS test samples were in good condition and received on 2020-11-09. The samples were numbered from 1 to 25 and 26 to 50.

Manufacturer: Hongli Zhihui Group Co.,Ltd. Guangzhou Branch

Part Number: HL-EMC-5050D90W-B6C2-S1-HR1

Part Type: LED Package
Drive Level: DC 750mA
Nominal CCT: 3000K

Power: 5W

Average Current Density per LED die: 302mA/mm²

Average Power Density per LED die: 1.71 W/mm²

CRI: 70

Die Spacing: 0.25mm

Note:

The applicant Hongli Zhihui Group Co.,Ltd. Guangzhou Branch declare that their products with model HL-EMC-5050D90W-B6C2-S1-HR1 are the same to the products in report#DG3210517-31183E-EE-17000-M1 and is authorized by original applicant to use their test data.

2 All the data in previous report (DG3210517-31183E-EE-17000-M1) is shared in this report.

Sampling Method:

LED samples for IESNA LM-80 testing consist of units built from a minimum of three manufacturing lots with each manufacturing lot built from different wafer lots built on non-consecutive days.


These manufacturing lots are picked to represent a wide parametric distribution.

Family products covered by this report:

According to ENERGY STAR® Requirements for the Use of LM-80 Data, the following products can be covered by this report base on the information and declaration provided by manufacturer. The information of these models shows that the covered products meet all section 4 requirements of ENERGY STAR® Requirements for the Use of LM-80 Data (September 28, 2017)

This report covers the following models#ILd

Model type	Model name of private label	Total Input Current (mA)	Power (W)	CCT (K)	Number of dies	Current Density per Die(mA/mm²)	Power Density per PCB (W/mm²)	Die Spacing (mm)	
Test model	HL-EMC-5050D90W- B6C2-S1-HR1	750	5	3000	12	302	0.21	0.25	



Bay Area Compliance Laboratories Corp. (Shenzhen)

5/F(B-West) -7/F, the 3rd Phase of Wan Li Industrial Building D, Shihua Road, Futian Free Trade Zone Shenzhen, Guangdong, China. The NVLAP Lab Code is 200707-0

multiple mode	HL-EMC-5050****W- B2C4-S1-HR*-***	300	3.6	2700-6500	8	302	0.14	0.25
multiple mode	HL-EMC-5050****W- B1C4-S1-HR*-***	150	1.8	2700-6500	4	302	0.07	0.25
multiple mode	HL-EMC-5050****W- B2C5-S1-HR*-***	300	4.5	2700-6500	10	302	0.18	0.25
multiple mode	HL-EMC-5050****W- B1C5-S1-HR*-***	150	2.2	2700-6500	5	302	0.09	0.25
multiple mode	HL-EMC-5050****W- B2C6-S1-HR*-***	300	5	2700-6500	12	302	0.21	0.25
							0.126	0.25
mode	B1C9-S1-HR*-***						0.162	0.25
multiple mode	HL-EMC-5050****W- B1C10-S1-HR*-***	150	4.8	2700-6500	10	302	0.192	0.25
multiple mode	HL-EMC-5050****W- B1C11-S1-HR*-***	150	5	2700-6500	11	302	0.198	0.25
multiple mode	HL-EMC-5050****W- B1C12-S1-HR*-***	150	5	2700-6500	12	302	0.21	0.25

Notes:

The model name begins with "HL", such as "HL-EMC-5050****W- B6C2-S1-HR*-***", "*" is described in detail as follows:

- The first * is the letters H, D, F which stands for the chip level . 1.
- 2.
- The second "***" is a number from 1 to 999 which stands for the brightness level.

 The third "*" is the number 1 to 7 which stands for different product solution (Color coordinate and applications and special solution etc)
- The forth "***" is the letter or None which stands for the customer code.

By Ara Camplana V sales S

Bay Area Compliance Laboratories Corp. (Shenzhen)

5/F(B-West) -7/F, the 3rd Phase of Wan Li Industrial Building D, Shihua Road, Futian Free Trade Zone Shenzhen, Guangdong, China. The NVLAP Lab Code is 200707-0

1.2 Standards and Reference Documentations

- ANSI/IES LM-80-15: IES Approved Method for Measuring Lumen Maintenance of LED Light Sources.
- *CIE 127:2007: Measurement of LEDs (This standard was not accredited by NVLAP)
- *ENERGY STAR® Requirements for the Use of LM-80 Data (This standard was not accredited by NVLAP)

1.3 Testing Equipment

Device	Manufacture	Model No	Serial No	Calibration date	Calibration due date
0.5m Integrating Sphere/CCD Spectrometer	Hangzhouyuming	0.5m /SPM-5000	C612012A	2022-11-18	2023-11-17
CC&CV DC Power Supply	Hangzhouyuming	DPS-500	W412022M	2022-11-18	2023-11-17
Standard Light Source	EVERFINE	D204	G100283CA8351158	2021-09-15	2023-09-14
Multilayer aging machine	BACL	B2-270	20022	2022-10-19	2023-10-18
Multilayer aging machine	BACL	B2-270	20022	2022-10-19	2023-10-18
LED Test Source	LED Test Source EVERFINE		P185616CJ1391143	2022-11-18	2023-11-17

1.4 Drive Level

Samples are driven with a constant direct current (DC) during maintenance test, photometric and electrical measurement. The current value was regulated to within ±3% of the specified value of the manufacturer during maintenance test, and was within ±0.5% during photometric and electrical measurement test.

1.5 Ambient Conditions for Maintenance Test

For lumen maintenance test, samples within one data set, were installed on cooling boards in thermal chambers with minimal ambient airflow. The case temperature and ambient temperature was monitored by thermocouples which one was soldered to the coldest DUTs' case (TMP_{LED}) location, while the other is mounted at a distance of 5 mm above the TMP location.

During life testing, TMP_{LED} of the coldest LEDs were maintained at a temperature that was greater than or equal to 2°C below the corresponding nominal case temperature. Surrounding air was maintained at a temperature that was greater than or equal to 5°C below the corresponding nominal case temperature. Thermocouples were shielded from direct DUT optical radiation and comply with ASTM E230 Table 1 "Special Limits".

Samples were connected to DC power supply in series circuits with a constant current. The forward current was regulated to within ±3% of the specified value of the manufacturer.

The relative humidity within chamber was kept less than 65% during test.

For photometry measurement, the ambient temperature during test was set to 25°C ± 2°C, RH <65%.

1.6 Photometric Measurement Method and Uncertainty

Integrating sphere and spectroradiometer is used to measure luminous flux and chromaticity coordinate u'v'. 2 measurement was used and sample was drived by DC power supply. The forward current was regulated to within $\pm 0.5\%$ of the nominal value. The test system was calibrated by halogen reference lamp. The ambient temperature during test was set to 25° C $\pm 2^{\circ}$ C, RH <65%. The temperature measurement point was located in the sphere and the temperature was detected by a temperature probe.

The uncertainty of the light output measurements is U=1.59% (K=2), at the 95% confidence level. The uncertainty of the correlated color temperature measurements is U=21K (K=2), at the 95% confidence level.

The uncertainty of the temperature is U=0.8671°C (K=2), at the 95% confidence level.

1.7 Statement of Traceability

Bay Area Compliance Laboratories Corp. (Shenzhen) attested that all calibration has been performed using suitable standards traceable to National Primary Standards and International System of Units (SI).

Any Area Complement Labor C

Bay Area Compliance Laboratories Corp. (Shenzhen)

5/F(B-West) -7/F, the 3rd Phase of Wan Li Industrial Building D, Shihua Road, Futian Free Trade Zone Shenzhen, Guangdong, China. The NVLAP Lab Code is 200707-0

1.8 Sample Set

Data Set 1: 85°C, 750mA

Part Number: HL-EMC-5050D90W-B6C2-S1-HR1

Number of Units: 25

Case Temperature: >83°C

Ambient Temperature: >80°C

Life Test Drive Current: 750mA

Measurement Current: 750mA

Data Set 2: 105°C, 750mA

Part Number: HL-EMC-5050D90W-B6C2-S1-HR1

Number of Units: 25

Case Temperature: >103°C

Ambient Temperature: >100°C

Life Test Drive Current: 750mA

Measurement Current: 750mA



2 - Summary of Test Result

Data Set:	Sample Size	Failures Observed:	Test Interval	Test Duration					oorted TM-21 . ₇₀ Lifetime		1	Reported TM-21 L ₉₀ Lifetime
1	25	0	1000hrs	17000hrs	2.414E-06	Ì	.004	>	02000) hours	3	45,000 hours
2	25	0	1000hrs	17000hrs	2.901E-06	-	.004	>	02000) hour	;	38,000 hours


Average Lumen Maintenance (Percentage of Initial Luminous Flux)


Data Set:	1000hrs	2000hrs	3000hrs	4000hrs	5000hrs	6000hrs	7000hrs	8000	hrs	9000ŀ	rs	10000hrs	11000hrs	12000hrs
1	100.20%	99.95%	99.71%	99.47%	99.22%	98.99%	98.76%	98.5	1%	98.28	%	98.06%	97.81%	97.58%
2	100.05%	99.76%	99.48%	99.20%	98.92%	98.64%	98.35%	98.0	6%	97.80	%	97.52%	97.24%	96.96%
	13000hrs	14000hrs	15000hrs	16000hrs	17000hrs									
	97.35%	97.11%	96.87%	96.63%	96.40%									
	96.67%	96.38%	96.12%	95.83%	95.54%									
Ĺ														

Average Chromaticity Shift

Data Set:	1000hrs	2000hrs	3000hrs	4000hrs	5000hrs	6000hrs	7000hrs	8000	hrs	9000ł	rs	1 <mark>0000hrs</mark>	11000hrs	12000hrs
1	0.0002	0.0003	0.0004	0.0005	0.0006	0.0007	0.0008	0.00	09	0.001	0	0.0011	0.0013	0.0015
2	0.0003	0.0004	0.0005	0.0006	0.0007	0.0008	0.0009	0.00	10	0.001	1	0.0012	0.0014	0.0016
	13000hrs	14000hrs	15000hrs	16000hrs	17000hrs									
	0.0017	0.0019	0.0021	0.0023	0.0025									
	0.0018	0.0020	0.0022	0.0024	0.0026									

Average Lumen Maintenance and Chromaticity Shift VS. Time

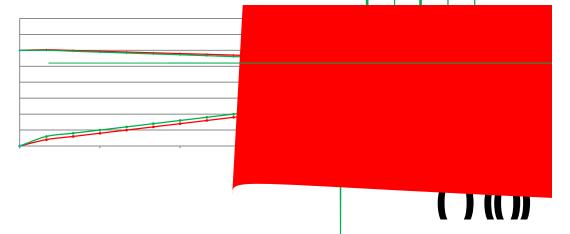





3 - Test Data


3.1 Data Set 1, 85°C, 750mA (Lumen Maintenance)

	(lm)						Lumen Mair	tenance (%)					
No.	0hr(Initial)	1000hrs	2000hrs	3000hrs	4000hrs	5000hrs	6000hrs	7000hrs	8000hrs	9000hrs	10000hrs	11000hrs	12000hrs
1	742.70	100.05	99.81	99.60	99.27	99.03	98.77	98.60	98.49	98.21	98.09	97.89	97.75
2	742.80	100.19	99.97	99.73	99.56	99.41	99.11	98.80	98.59	98.29	98.02	97.89	97.62
3	748.90	100.23	99.93	99.73	99.59	99.39	99.09	98.89	98.66	98.50	98.24	97.97	97.74
4	747.30	100.07	99.83	99.65	99.33	99.13	99.00	98.69	98.37	98.14	98.02	97.68	97.47
5	736.60	100.12	99.93	99.74	99.55	99.33	99.02	98.75	98.52	98.26	98.09	97.81	97.53
6	747.80	100.24	100.07	99.71	99.56	99.32	99.18	98.93	98.64	98.44	98.15	97.91	97.55
7	742.90	100.07	99.78	99.58	99.37	99.19	98.96	98.63	98.32	98.16	98.02	97.83	97.51
8	748.20	100.21	100.01	99.83	99.43	99.22	99.01	98.70	98.42	98.18	98.04	97.83	97.61
9	743.70	100.24	99.88	99.73	99.37	99.06	98.75	98.53	98.25	98.05	97.77	97.62	97.39
10	743.90	100.12	99.99	99.74	99.53	99.19	98.91	98.70	98.48	98.31	98.00	97.84	97.69
11	742.50	100.13	99.88	99.58	99.37	99.02	98.76	98.57	98.21	97.99	97.85	97.67	97.48
12	741.00	100.19	100.03	99.73	99.53	99.33	99.11	98.87	98.61	98.37	98.16	97.92	97.77
13	746.70	100.32	100.13	99.80	99.57	99.28	99.05	98.73	98.41	98.15	97.99	97.63	97.25
14	743.70	100.23	99.95	99.80	99.58	99.35	99.10	98.94	98.62	98.44	98.18	97.89	97.66
15	747.80	100.29	99.93	99.59	99.29	99.02	98.89	98.74	98.49	98.34	98.18	97.91	97.73
16	750.50	100.31	99.97	99.73	99.52	99.21	98.89	98.76	98.48	98.31	98.07	97.84	97.68
17	746.40	100.19	99.99	99.85	99.58	99.37	99.16	98.87	98.69	98.49	98.33	98.06	97.87
18	745.70	100.17	99.92	99.72	99.41	99.05	98.89	98.58	98.38	98.10	97.91	97.63	97.39
19	742.90	100.24	99.91	99.72	99.53	99.31	99.06	98.79	98.43	98.20	97.90	97.55	97.33
20	742.30	100.32	100.00	99.84	99.49	99.30	99.06	98.77	98.60	98.29	97.94	97.71	97.52
21	748.70	100.24	99.99	99.67	99.44	99.13	98.86	98.69	98.46	98.22	97.92	97.72	97.52
22	745.10	100.23	100.05	99.80	99.60	99.34	99.17	99.03	98.81	98.66	98.54	98.24	98.00
23	746.80	100.24	99.97	99.69	99.48	99.30	99.16	98.94	98.77	98.53	98.17	97.79	97.54
24	743.50	100.17	99.81	99.57	99.19	99.06	98.82	98.59	98.41	98.08	97.90	97.70	97.43
25	745.00	100.20	99.99	99.73	99.53	99.21	99.01	98.87	98.54	98.30	97.93	97.66	97.50
Avg.	744.94	100.20	99.95	99.71	99.47	99.22	98.99	98.76	98.51	98.28	98.06	97.81	97.58
Med.	745.00	100.21	99.97	99.73	99.52	99.22	99.01	98.75	98.49	98.29	98.02	97.83	97.54
st dev	3.06	0.08	0.08	0.08	0.11	0.13	0.13	0.13	0.15	0.16	0.17	0.16	0.17
Min.	736.60	100.05	99.78	99.57	99.19	99.02	98.75	98.53	98.21	97.99	97.77	97.55	97.25
Мах.	750.50	100.32	100.13	99.85	99.60	99.41	99.18	99.03	98.81	98.66	98.54	98.24	98.00




NI.		Lumen N	1aintenance	(%)	
No.	13000hrs	14000hrs	15000hrs	16000hrs	17000hrs
1	97.63	97.40	97.17	96.93	96.63
2	97.29	97.07	96.89	96.57	96.43
3	97.46	97.12	96.78	96.55	96.33
4	97.26	97.10	96.98	96.67	96.53
5	97.26	97.11	96.88	96.73	96.46
6	97.31	97.03	96.86	96.60	96.47
7	97.31	97.12	96.97	96.69	96.46
8	97.45	97.19	97.03	96.82	96.51
9	97.11	96.95	96.67	96.36	96.21
10	97.45	97.20	97.04	96.84	96.63
11	97.31	97.12	96.79	96.47	96.18
12	97.58	97.29	97.11	96.86	96.60
13	97.08	96.80	96.52	96.29	96.14
14	97.43	97.19	96.93	96.72	96.42
15	97.39	97.19	96.88	96.75	96.56
16	97.47	97.32	97.18	96.95	96.76
17	97.55	97.31	97.15	96.96	96.73
18	97.20	97.00	96.73	96.57	96.43
19	97.11	96.81	96.63	96.35	96.23
20	97.31	97.12	96.90	96.62	96.28
21	97.32	97.03	96.69	96.46	96.23
22	97.68	97.33	97.09	96.86	96.63
23	97.27	96.95	96.67	96.45	96.05
24	97.05	96.79	96.46	96.18	95.88
25	97.38	97.17	96.86	96.58	96.24
Avg.	97.35	97.11	96.87	96.63	96.40
Med.	97.31	97.12	96.88	96.62	96.43
st dev	0.17	0.16	0.20	0.21	0.22
Min.	97.05	96.79	96.46	96.18	95.88
Мах.	97.68	97.40	97.18	96.96	96.76






No.		Forwar	d Voltage (\	V)	•
INO.	13000hrs	14000hrs	15000hrs	16000hrs	17000hrs
1	7.930	7.646	7.436	7.590	8.218
2	7.886	7.695	7.550	7.612	7.713
3	7.798	7.716	7.518	7.534	7.542
4	7.904	7.656	7.152	7.626	7.409
5	7.782	7.677	7.954	7.625	7.605
6	7.855	7.591	7.481	7.671	7.496
7	7.804	7.489	7.260	7.676	7.720
8	7.816	7.589	7.426	7.576	7.648
9	7.782	7.580	7.437	7.572	7.603
10	7.823	7.577	7.463	7.739	7.786
11	7.700	7.658	7.424	7.650	7.670
12	7.813	7.691	7.733	7.621	7.697
13	7.748	7.611	7.858	7.737	7.754
14	7.723	7.575	7.929	7.691	7.934
15	7.721	7.647	7.537	7.904	7.822
16	7.786	7.698			




3.3 Data Set 1, 85°C, 750mA (Chromaticity Shift)

No.	u'	v'	CCT(K)	Chromaticity Shift (u'v')											
INO.	Ohr(Initial)		1000hrs	2000hrs	3000hrs	4000hrs	5000hrs	6000hrs	7000hrs	8000hrs	9000hrs	10000hrs	11000hrs	12000hrs	
1	0.2482	0.5130	3119	0.0004	0.0004	0.0004	0.0004	0.0006	0.0007	0.0008	0.0008	0.0008	0.0009	0.0010	0.0011
2	0.2488	0.5139	3096	0.0002	0.0004	0.0005	0.0005	0.0007	0.0009	0.0009	0.0010	0.0011	0.0011	0.0012	0.0012
3	0.2491	0.5146	3082	0.0001	0.0003	0.0004	0.0007	0.0007	0.0008	0.0008	0.0011	0.0012	0.0012	0.0012	0.0013
4	0.2485	0.5144	3100	0.0002	0.0004	0.0004	0.0006	0.0007	0.0009	0.0009	0.0011	0.0013	0.0013	0.0014	0.0014
5	0.2483	0.5125	3121	0.0001	0.0003	0.0004	0.0005	0.0007	0.0008	0.0009	0.0009	0.0010	0.0012	0.0014	0.0017
6	0.2481	0.5149	3107	0.0002	0.0004	0.0005	0.0005	0.0007	0.0007	0.0009	0.0009	0.0009	0.0010	0.0013	0.0013
7	0.2479	0.5113	3141	0.0002	0.0002	0.0002	0.0004	0.0005	0.0006	0.0006	0.0006	0.0008	0.0008	0.0009	0.0012
8	0.2491	0.5144	3084	0.0001	0.0002	0.0005	0.0007	0.0009	0.0009	0.0010	0.0012	0.0011	0.0011	0.0012	0.0014
9	0.2486	0.5129	3107	0.0002	0.0004	0.0004	0.0005	0.0006	0.0008	0.0009	0.0010	0.0011	0.0012	0.0013	0.0015
10	0.2489	0.5150	3086	0.0002	0.0003	0.0004	0.0008	0.0008	0.0009	0.0010	0.0012	0.0014	0.0016	0.0018	0.0020
11	0.2487	0.5143	3095	0.0002	0.0004	0.0004	0.0004	0.0005	0.0006	0.0006	0.0007	0.0009	0.0011	0.0013	0.0016
12	0.2486	0.5135	3106	0.0003	0.0004	0.0005	0.0004	0.0004	0.0004	0.0006	0.0008	0.0009	0.0009	0.0011	0.0012
13	0.2484	0.5123	3120	0.0004	0.0005	0.0004	0.0004	0.0004	0.0006	0.0006	0.0008	0.0009	0.0009	0.0	0.0013
11	0.2409	0.5127	2070	0.0003	0.0004	0.0005	0.0005	0.0006	0.0006	0.0007	0.0000	0.0010	0.0011	0.0014	0.0014




	Chromaticity Shift (u'v')							
No.	13000hrs	14000hrs	15000hrs	16000hrs	17000hrs			
1	0.0013	0.0015	0.0018	0.0021	0.0024			
2	0.0013	0.0017	0.0020	0.0023	0.0026			
3	0.0015	0.0017	0.0020	0.0023	0.0025			
4	0.0015	0.0016	0.0019	0.0020	0.0023			
5	0.0019	0.0019	0.0023	0.0025	0.0027			
6	0.0014	0.0015	0.0019	0.0020	0.0022			
7	0.0013	0.0015	0.0018	0.0021	0.0024			
8	0.0015	0.0017	0.0020	0.0021	0.0024			
9	0.0017	0.0018	0.0018	0.0019	0.0021			
10	0.0021	0.0022	0.0024	0.0024	0.0025			
11	0.0018	0.0021	0.0022	0.0023	0.0024			
12	0.0017	0.0017	0.0019	0.0021	0.0022			
13	0.0017	0.0019	0.0021	0.0024	0.0026			
14	0.0017	0.0018	0.0020	0.0023	0.0025			
15	0.0017	0.0019	0.0019	0.0023	0.0024			
16	0.0017	0.0021	0.0022	0.0026	0.0028			
17	0.0016	0.0020	0.0021	0.0025	0.0027			
18	0.0014	0.0018	0.0020	0.0023	0.0025			
19	0.0016	0.0019	0.0021	0.0023	0.0027			
20	0.0018	0.0022	0.0022	0.0025	0.0027			
21	0.0018	0.0021	0.0022	0.0024	0.0026			
22	0.0020	0.0023	0.0023	0.0024	0.0026			
23	0.0021	0.0024	0.0025	0.0026	0.0028			
24	0.0017	0.0020	0.0021	0.0022	0.0023			
25	0.0017	0.0021	0.0023	0.0024	0.0026			
Avg.	0.0017	0.0019	0.0021	0.0023	0.0025			
Med.	0.0017	0.0019	0.0021	0.0023	0.0025			
st dev	0.0002	0.0003	0.0002	0.0002	0.0002			
Min.	0.0013	0.0015	0.0018	0.0019	0.0021			
Мах.	0.0021	0.0024	0.0025	0.0026	0.0028			

Bay Area Compliance Laboratories Corp. (Shenzhen) 5/F(B-West) -7/F, the 3rd Phase of Wan Li Industrial




	Lumen Maintenance (%)							
No.	13000hrs	14000hrs	15000hrs	16000hrs	17000hrs			
26	96.98	96.79	96.47	96.14	95.86			
27	96.50	96.21	96.00	95.67	95.36			
28	96.66	96.27	95.95	95.62	95.32			
29	96.55	96.34	96.07	95.71	95.33			
30	97.11	96.87	96.61	96.43	96.28			
31	96.96	96.56	96.27	96.00	95.60			
32	96.68	96.39	96.08	95.76	95.44			
33	96.78	96.50	96.20	95.80	95.42			
34	96.79	96.47	96.28	95.94	95.59			
35	96.89	96.65	96.37	96.01	95.63			
36	96.58	96.32	96.05	95.80	95.57			
37	96.44	96.13	95.82	95.55	95.24			
38	96.53	96.20	95.92	95.57	95.22			
39	96.49	96.14	95.90	95.50	95.28			
40	96.98	96.63	96.40	96.11	95.84			
41	96.55	96.23	96.02	95.83	95.49			
42	96.60	96.28	95.96	95.58	95.35			
43	96.54	96.16	96.01	95.73	95.36			
44	96.59	96.42	96.19	95.95	95.66			
45	96.80	96.55	96.25	96.09	95.80			
46	96.61	96.27	96.03	95.79	95.53			
47	96.44	96.25	95.93	95.67	95.39			
48	96.42	96.06	95.79	95.59	95.28			
49	96.63	96.40	96.22	96.04	95.88			
50	96.74	96.50	96.11	95.95	95.71			
Avg.	96.67	96.38	96.12	95.83	95.54			
Med.	96.61	96.34	96.07	95.80	95.49			
st dev	0.19	0.21	0.21	0.23	0.25			
Min.	96.42	96.06	95.79	95.50	95.22			
Мах.	97.11	96.87	96.61	96.43	96.28			



NI-	Forward Voltage (V)							
No.	13000hrs	14000hrs	15000hrs	16000hrs	17000hrs			
26	8.045	7.557	7.886	7.819	7.769			
27	7.751	7.562	7.806	7.689	7.765			
28	7.795	7.699	7.788	7.674	7.960			
29	7.807	7.588	7.759	7.856	7.988			
30	7.737	7.534	7.698	7.581	7.729			
31	7.717	7.577	7.926	7.881	7.757			
32	7.610	7.502	7.729	7.706	7.783			
33	7.681	7.647	7.581	7.674	7.826			
34	7.685	7.626	7.637	7.693	7.857			
35	7.578	7.613	7.599	7.753	7.698			
36	7.644	7.688	7.665	8.013	8.241			
37	7.549	7.788	7.575	8.155	7.898			
38	7.701	7.858	7.606	7.850	8.966			
39	7.593	7.657	7.583	8.195	8.554			
40	7.512	7.558	7.806	8.082	8.097			
41	7.724	7.769	7.889	8.191	8.311			
42	7.679	7.822	7.804	8.157	8.182			
43	7.584	7.768	7.727	8.057	8.043			
44	7.556	7.784	7.894	8.082	7.747			
45	7.473	7.738	7.778	8.023	7.875			
46	7.520	7.631	7.660	8.021	8.344			
47	7.626	7.748	7.552	8.142	7.902			
48	7.547	7.549	7.546	7.892	8.371			
49	7.517	7.636	7.621	7.912	7.759			
50	7.478	7.620	7.629	7.999	7.815			
Avg.	7.644	7.661	7.710	7.924	8.009			
Med.	7.626	7.636	7.698	7.912	7.898			
st dev	0.128	0.100	0.118	0.188	0.311			
Min.	7.473	7.502	7.546	7.581	7.698			
Max.	8.045	7.858	7.926	8.195	8.966			


Bay Area Compliance Laboratories Corp. (Shenzhen) 5/F(B-West) -7/F, the 3rd Phase of Wan Li Industrial



No.	Chromaticity Shift (u'v')
INO.	


4 - DUT Photo


4.1 Mechanical Dimensions

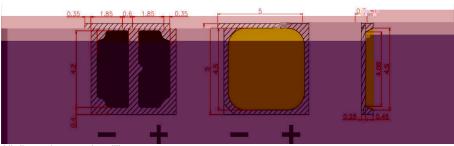

All dimensions are in millimeter

4.2 DUT Photo

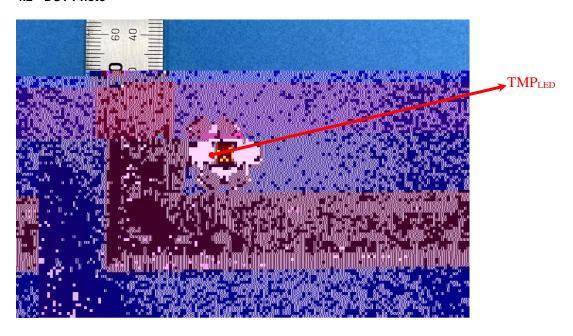



Directions

******END C	OF REPORT	C*********